

Generation Scandinavia

Standard specification

Chassis / Base vehicle

- System lightweight chassis
- Zinc-plated chassis with semi-trailing arm axle and single-wheel suspension, inertia braking system with reversing automatic
- AAA Self-adjusting brake
- AKS Stabiliser
- Octagon Shock absorber
- Weight upgrade (depending on layout)
- Alloy wheels
- A-frame cover
- Light-weight steadies, galvanised incl. large supporting feet
- Sidewall skirts with integrated side-marker lamps
- High-quality tyres for tempo 100 regulation
- Manoeuvring handles in Chrome

Conversion

- Front, rear and sidewalls in White smooth sides with special application design
- Front, rear, roof, sidewalls and floor with XPS insulation
- Robust GRP roof
- Front parts in gas locker area made of LFI (Long Fiber Injection), shock resistant, robust and repair-friendly
- Floor thickness: 42mm, sides/roof: 34mm
- Shapely front and Integral lamps in rear moulding with mid-level attachment
- Opening, insulating, double-glazed trapezed window (graphit grey) with blind and flyscreen
- Panorama front window reaching rooftop (only for 655 RFK)
- Fully-insulated wheel houses
- Extra wide entrance door with window and flyscreen, one-piece
- Clear glass Mini Heki with blind and flyscreen
- Clear glass skylight with blinds and flyscreen incl. spots, operation by crank handle
- Access locker door

On-board installations

- Gas bottle locker for 2 x 11 kg bottles
- Space-saving gas locker door to pivot upwards

- Floor of the gas bottle locker made of rot resistant and robust Aluminium
- Moveable waste water tank in gas locker
- Spare wheel bracket in gas bottle locker
- Spare wheel or break-down kit
- Electrical water supply
- Comfortable ALDE Compact warm water heating
- ALDE warm water floor heating
- Heating elements' operation by I-Net box and by App via Smartphone
- Waste water pipes insulated and heated
- Pre-wiring for air conditioning
- 12 V power supply for the complete vehicle
- Compact electro block with 230V safety device and 12V cut-out in wardrobe incl. powerful transformer 340W
- CEE external socket for 230V on-board electrics
- Practical multi-functional exterior socket 12V / 220V / TV and SAT
- Gas exterior socket
- Awning light
- Gas control for gas hose
- LED light bar system 12V (heading section bed and seating lounge)
- Indirect illumination
- Variable USB power socket for light bar system
- Flatscreen bracket (aerial wire and TV bracket)

Kitchen

- Large fridge with 142l (thereof 15l freezer compartment)
- Spacious drawers with high-quality Quadro drawer slide, soft-close and silent system for absolutely low noise closing
- Practical apothecary pull-out drawer

Bathroom

- Skylight with flyscreen
- LED lights
- Shower base
- Integrated design wash bowl made of solid surface material


Living comfort

- AirPlus - perfect air ventilation for the interior and ventilation of the overhead lockers and sideboards
- Adjustable special slatted frame with flexible rubber cores, adjustable for optimal use of storage compartments under the beds
- Ergonomic 7-zone EvoPoreHRC mattress for all fixed beds and bunk beds
- Bunk beds with fall-out protection net and ladder
- Bunk bed loading up to 80kg
- Lower bunk bed with fold-away function incl. large access locker door (for all layouts with bunk beds crossways)
- One-leg lifting table, height-adjustable and sliding
- Seating lounge convert to bed
- Carpets specifically designed for the particular living and sleeping areas
- Luxury bed spread, individually designed
- Easy single bed conversion to double bed

Interior

- Wood décor Rosario Cherry with the soft furnishing Scandi

Generation Scandinavia Technical info

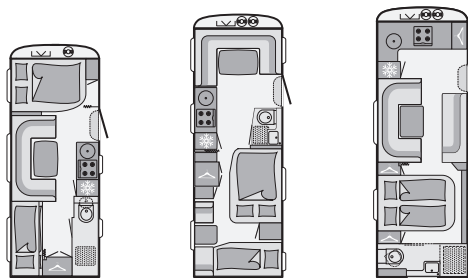

GENERATION SCANDINAVIA		545 QMK	655 RFK	695 BQT
Width	cm	250	250	250
Length conversion/ total	cm	650 / 768	735 / 872	765 / 901
Total height/ awning size	cm	265 / 1045	265 / 1130	265 / 1160
Bed front	cm	195x135	230x135	-
Bed lengthwise	cm	230x115	200x140	230x115
Bed alternative	cm	-	-	-
Bed rear	cm	190x75 190x70	2x (185x75)	200x155
Sleeping berths		6	7	4
Mass in running order (MIRO)	kg	0	0	0
Payload	kg	2000	2500	2500
Maximum authorised weight	kg	2000	2500	2500
Max. weight upgrade	kg	-keine-	-keine-	-keine-
Chassis single axle (1), Tandem axle (2)		1	2	2
Heating		ALDE	ALDE	ALDE
Fridge/ thereof freezer compartment	l	142 / 15	142 / 15	175 / 31
Tank volume fresh water/ waste water	l	38 / 22	38 / 22	38 / 22

Packages

Shower package ca. 7 kg

Package components

Shower equipment	✓
City water connection	✓

Options

	Additional weight (kg)	Code	545 QMK	655 RPK	695 BQT
Chassis/ Base					
ATC Trailer Control	4	748	○	○	○
Spare alloy wheel 195/70 R14 C-LI 102	17	861	-	○	○
Break-down kit	1	620	⊙	○	○
Bodywork exterior					
Front window	4	982	○	⊙	○
Styrofoam insulation for sidewalls, rear and front	0,5 kg/m ²	179	○	○	-
Access locker door 1070x300 (front left)	2	1083	-	○	-
Access locker door 750x300 (front right)	2	1076	-	○	-
Bodywork interior					
Fire extinguisher	3,5	843	○	○	○
Smoke detector	0,5	8949	○	○	○
Furniture layouts					
3rd bunk bed	20	200	○	○	-
Kitchen					
Oven	17	572	○	○	○
Extractor fan	3	785	○	○	○
Soft furnishing					
WATERGEL mattress for double bed	4	8214	○	○	○
Gas installation					
Duo control gas controller with crash sensor	2,5	784	○	○	○
Water supply / installation					
Exterior shower	2	396	○	○	○
Fresh water tank 70 l	2,5	592	○	○	○
Multimedia systems					
TV 22" incl. DVD and receiver	3,5	1103	○	○	○
Misc					
Registration documents	0	0	○	○	○

- not available ○ option ⊙ Standard specification u.r. upon request